

KAF-6303

ATTN:
Scott Sinclair

KAF- 6303

3072 (H) x 2048 (V) Pixel

Full-Frame CCD Image Sensor

Performance Specification

Eastman Kodak Company

Microelectronics Technology Division

Rochester, New York 14650-2010

Revision 0

January 5, 1999



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

TABLE OF CONTENTS

1.1 Features-----	3
1.2 Description-----	3
1.3 Image Acquisition-----	4
1.4 Charge Transport-----	4
1.5 Output Structure-----	4
1.6 Dark Reference Pixels-----	4
1.7 Dummy Pixels-----	4
2.1 Package Configuration-----	5
2.2 Pin Description-----	6
3.1 Absolute Maximum Ratings-----	7
3.2 DC Operating Conditions-----	8
3.3 AC Operating Conditions-----	9
3.4 AC Timing Conditions-----	9
4.1 Performance Specifications-----	11
4.2 Typical Performance Characteristics - Spectral Response-----	12
4.3 Defect Classification-----	13
5.1 Quality Assurance and Reliability-----	14
5.2 Ordering Information-----	14

APPENDICES

Appendix 1 Part Number Availability-----	15
--	----

FIGURES

Figure 1 Functional Block Diagram-----	3
Figure 2 Package Configuration-----	5
Figure 3 Package Pin Designations-----	6
Figure 4 Recommended Output Structure Load Diagram-----	8
Figure 5 Timing Diagrams-----	10



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

1.1 Features

6M Pixel Area CCD

3072H x 2048V (9 μ m) Pixels

27.65 mm H x 18.48 mm V Photosensitive Area

2-Phase Register Clocking

Enhanced Responsivity

100% Fill Factor

High Output Sensitivity (10 μ V/e⁻)

Low Dark Current (<10pA/cm² @ 25°C)

1.2 Description

The KAF-6303 is a high performance monochrome area CCD (charge-coupled device) image sensor with 3072H x 2048V photo active pixels designed for a wide range of image sensing applications in the 0.4 μ m to 1.0 μ m wavelength band. Typical applications include military, scientific, and industrial imaging. A 74 dB dynamic range is possible operating at room temperature.

The sensor is built with a true two-phase CCD technology which simplifies the support circuits that drive the sensor and reduces the dark current without compromising charge capacity. Total chip size is 29.0 mm x 19.1 mm and is housed in a 26-pin, 0.88" wide DIL ceramic package with 0.1" pin spacing.

The sensor consists of 3088 parallel (vertical) CCD shift registers each 2056 elements long. These registers act as both the photosensitive elements and as the transport circuits that allow the image to be sequentially read out of the sensor. The elements of these registers are arranged into a 3072 x 2048 photosensitive array surrounded by a light shielded dark reference of 16 columns and 8 rows. The parallel (vertical) CCD registers transfer the image one line at a time into a single 3100 element (horizontal) CCD shift register. The horizontal register transfers the charge to a single output amplifier. The output amplifier is a two stage source follower that converts the photo generated charge to a voltage for each pixel.

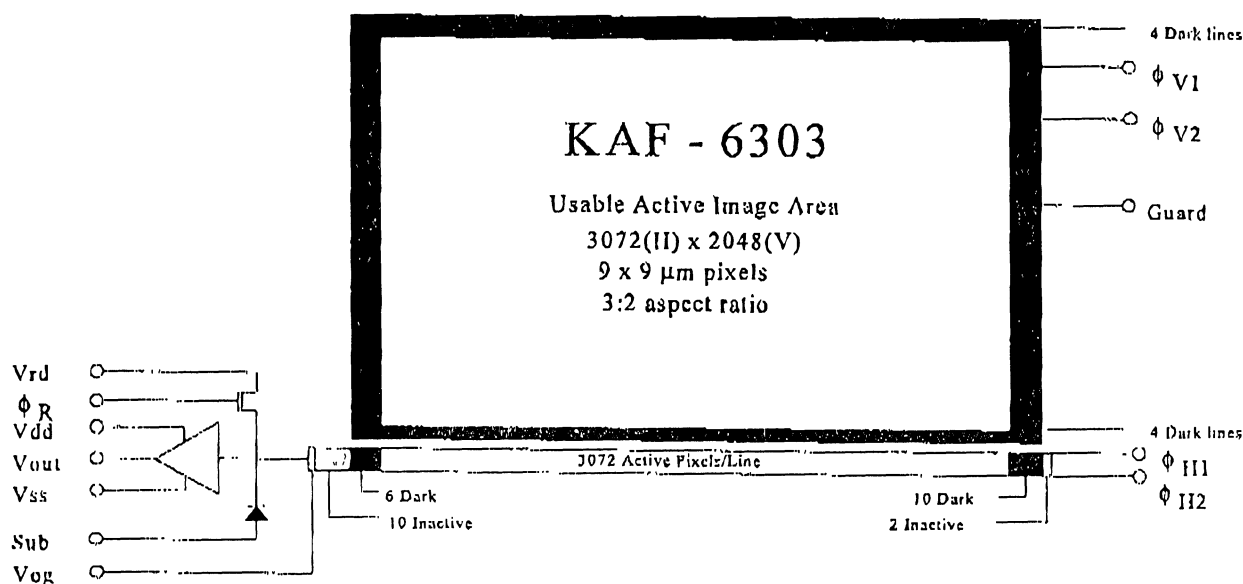


Figure 1 - Functional Block Diagram



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

1.3 Image Acquisition

An electronic representation of an image is formed when incident photons falling on the sensor plane create electron-hole pairs within the sensor. These photon induced electrons are collected locally by the formation of potential wells at each photogate or pixel site. The number of electrons collected is linearly dependent on light level and exposure time and non-linearly dependent on wavelength. When the pixel's capacity is reached, excess electrons will leak into the adjacent pixels within the same column. This is termed blooming. During the integration period, the $\Phi V1$ and $\Phi V2$ register clocks are held at a constant (low) level.

See Figure 5. - Timing Diagrams.

1.4 Charge Transport

Referring again to Figure 5 - Timing Diagrams, the integrated charge from each photogate is transported to the output using a two step process. Each line (row) of charge is first transported from the vertical CCD's to the horizontal CCD register using the $\Phi V1$ and $\Phi V2$ register clocks. The horizontal CCD is presented a new line on the falling edge of $\Phi V2$ while $\Phi H1$ is held high. The horizontal CCD's then transport each line, pixel by pixel, to the output structure by alternately clocking the $\Phi H1$ and $\Phi H2$ pins in a complementary fashion. On each falling edge of $\Phi H2$ a new charge packet is transferred onto a floating diffusion and sensed by the output amplifier.

1.5 Output Structure

Charge presented to the floating diffusion (FD) is converted into a voltage and current amplified in order to drive off-chip loads. The resulting voltage change seen at the output is linearly related to the amount of charge placed on FD. Once the signal has been sampled by the system electronics, the reset gate (ΦR) is clocked to remove the signal and FD is reset to the potential applied by V_{rd} . More signal at the floating diffusion reduces the voltage seen at the output pin. In order to activate the output structure, an off-chip load must be added to the Vout pin of the device - see Figure 4.

1.6 Dark Reference Pixels

Surrounding the peripheral of the device is a border of light shielded pixels. This includes 6 leading and 10 trailing pixels on every line excluding dummy pixels. There are also 4 full dark lines at the start of every frame and 4 full dark lines at the end of each frame. Under normal circumstances, these pixels do not respond to light. However, dark reference pixels in close proximity to an active pixel, or the outer bounds of the chip (including the first two lines out), can scavenge signal depending on light intensity and wavelength and therefore will not represent the true dark signal.

1.7 Dummy Pixels

Within the horizontal shift register are 10 leading and 2 trailing additional shift phases which are not associated with a column of pixels from the vertical register. These pixels contain only horizontal shift register dark current signal and do not respond to light. A few leading dummy pixels may scavenge false signal depending on operating conditions.



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

2.1 Package Configuration

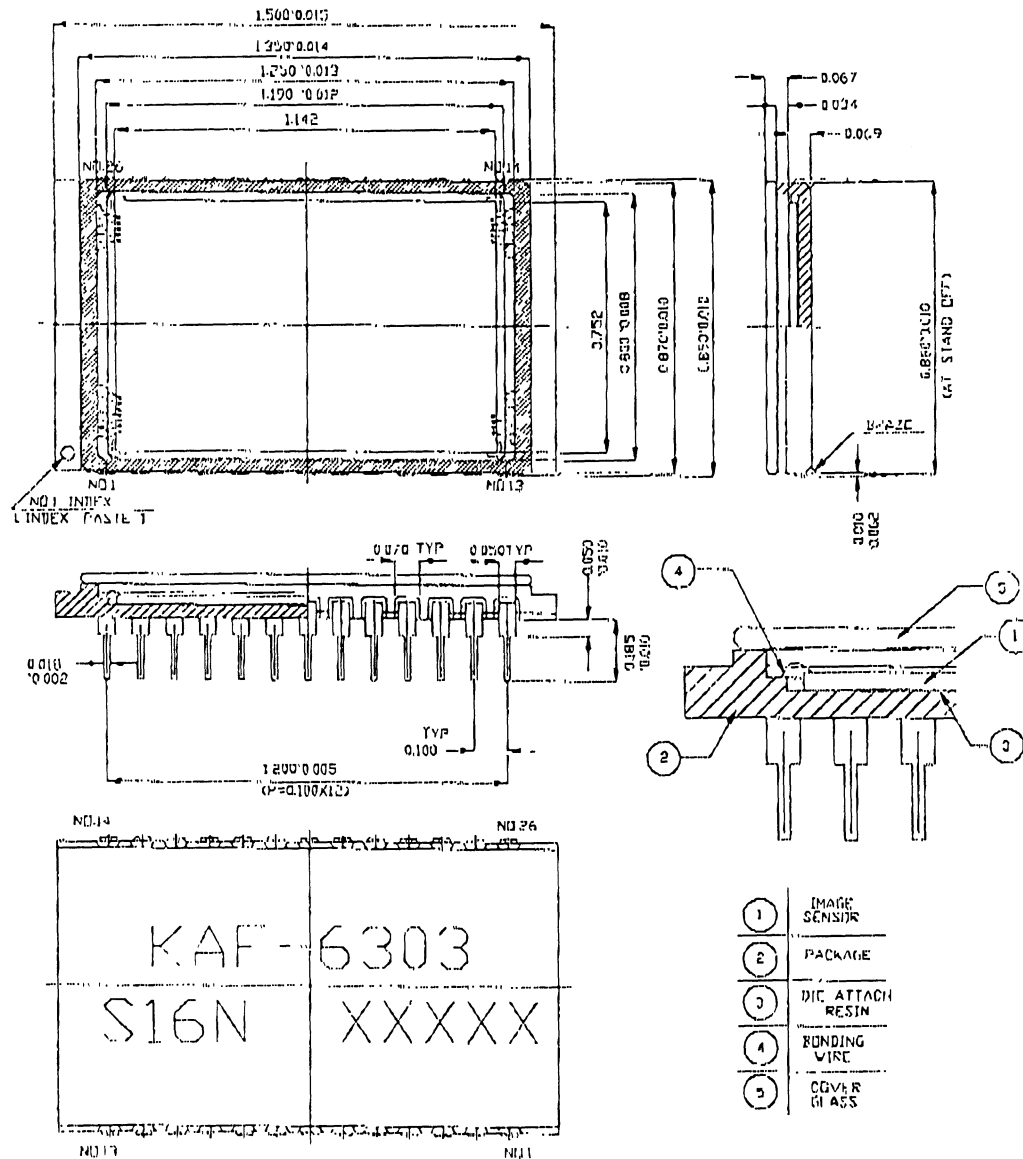


Figure 2 - Package Configuration



Easunan Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**2.2 Pin Description**

Pin	Symbol	Description	Pin	Symbol	Description
1, 13, 14, 15, 26	Vsub	Substrate (Ground)	10	ϕ_{H1}	Horizontal CCD Clock - Phase 1
2	Vout	Video Output	11	ϕ_{H2}	Horizontal CCD Clock - Phase 2
3	Vdd	Amplifier Supply	16, 17, 22, 23	ϕ_{V1}	Vertical CCD Clock - Phase 1
4	Vrd	Reset Drain	18, 19, 20, 21	ϕ_{V2}	Vertical CCD Clock - Phase 2
5	ϕ_R	Reset Clock	24	Vguard	Guard Ring
6	Vss	Amplifier Supply Return	25	Vog	Output Gate
7, 8, 9, 12	N/C	No connection (open pin)			

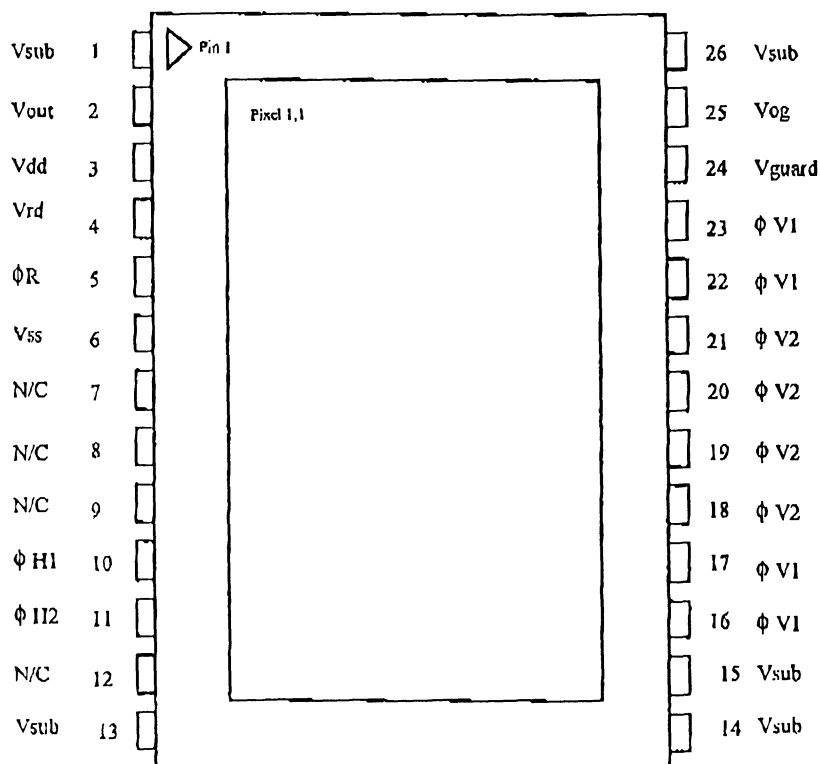


Figure 3 - Package Pin Designations



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**3.1 Absolute Maximum Ratings**

Description	Symbol	Min.	Max.	Units	Notes
Diode Pin Voltages	Vdiode	0	20	V	1, 2
Gate Pin Voltages - Type 1	Vgate1	-16	16	V	1, 3
Gate Pin Voltages - Type 2	Vgate2	0	16	V	1, 4
Inter-Gate Voltages	Vg-g		16	V	5
Output Bias Current	Iout		-10	mA	6
Output Load Capacitance	Cload		15	pF	6
Storage Temperature	T	0	70	°C	
Humidity	RH	5	90	%	7

Notes:

1. Referenced to pin Vsub.
2. Includes pins: Vrd, Vdd, Vss, Vout, Vguard.
3. Includes pins: $\phi V1$, $\phi V2$, $\phi H1$, $\phi I12$.
4. Includes pins: ϕR , V_{og}.
5. Voltage difference between overlapping gates. Includes: $\phi V1$ to $\phi V2$, $\phi I11$ to $\phi I12$, $\phi V2$ to $\phi I11$, $\phi H2$ to V_{og}.
6. Avoid shorting output pins to ground or any low impedance source during operation.
7. T=25°C. Excessive humidity will degrade MTF.

CAUTION: This device contains limited protection against Electrostatic Discharge (ESD). Devices should be handled in accordance with strict ESD protective procedures for Class 1 devices.



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**3.2 DC Operating Conditions**

Description	Symbol	Min.	Nom.	Max.	Units	Max DC Current (mA)	Notes
Reset Drain	Vrd	10.5	11	11.5	V	0.01	
Output Amplifier Return	Vss	1.5	2.0	2.5	V	0.45	
Output Amplifier Supply	Vdd	14.5	15	15.5	V	Iout	
Substrate	Vsub	0	0	0	V	0.01	
Output Gate	Vog	3.75	4.0	5.0	V	0.01	
Guard Ring	Vguard	8.0	10.0	12.0	V	0.01	
Video Output Current	Iout		-5	-10	mA	-	1

Notes:

1. An output load sink must be applied to Vout to activate output amplifier - see Figure below.

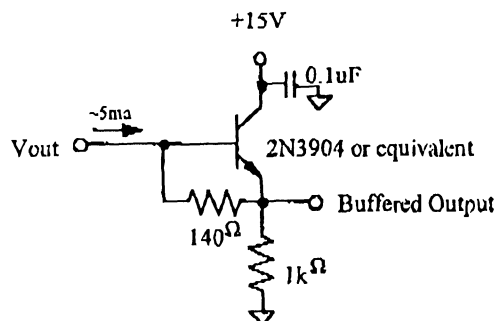


Figure 4 - Recommended Output Structure Load Diagram



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**3.3 AC Operating Condition**

Description	Symbol	Level	Min.	Nom.	Max.	Units	Effective Capacitance	Notes
Vertical CCD Clock - Phase 1	$\phi V1$	Low	-9.0	-8.0	-7.5	V	200nF (all $\phi V1$ pins)	
		High	0.5	1.0	1.5	V		
Vertical CCD Clock - Phase 2	$\phi V2$	Low	-9.0	-8.0	-7.5	V	200nF (all $\phi V2$ pins)	
		High	0.5	1.0	1.5	V		
Horizontal CCD Clock - Phase 1	$\phi H1$	Low	-6.0	-4.0	-3.5	V	150pF	
		High	4.0	6.0	6.5	V		
Horizontal CCD Clock - Phase 2	$\phi H2$	Low	-6.0	-4.0	-3.5	V	150pF	
		High	4.0	6.0	6.5	V		
Reset Clock	ϕR	Low	-4.0	-2.0	-	V	10pF	
		High	3.5	4.0	1.75 5.0	V		

Notes:

1. All pins draw less than 10uA DC current.
2. Capacitance values relative to VSUB.

3.4 AC Timing Conditions

Description	Symbol	Min.	Nom.	Max.	Units	Notes
$\phi H1, \phi H2$ Clock Frequency	f_{H1}		4	15	MHz	1, 2, 3
$\phi V1, \phi V2$ Clock Frequency	f_V		25	50	kHz	1, 2, 3
Pixel Period (1 Count)	t_c	67	250		ns	
$\phi H1, \phi H2$ Setup Time	$t_{\phi HS}$	0.5	1		us	
$\phi V1, \phi V2$ Clock Pulse Width	$t_{\phi V}$	10	20		us	2
Reset Clock Pulse Width	$t_{\phi R}$	10	20		ns	4
Readout Time	$t_{readout}$	531	1719		ms	5
Integration Time	t_{int}					6
Line Time	t_{line}	258.2	836		us	7

Notes:

1. 50% duty cycle values.
2. CTE may degrade above the nominal frequency.
3. Rise and fall times (10/90% levels) should be limited to 5-10% of clock period. Cross-over of register clocks should be between 40-60% of amplitude.
4. ϕR should be clocked continuously.
5. $t_{readout} = (2056 * t_{line})$
6. Integration time is user specified. Longer integration times will degrade noise performance.
7. $t_{line} = (3 * t_{\phi V}) + t_{\phi HS} + (3100 * t_c) + t_c$




Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385


Fax (716) 477-4947

KAF-6303


Frame Timing

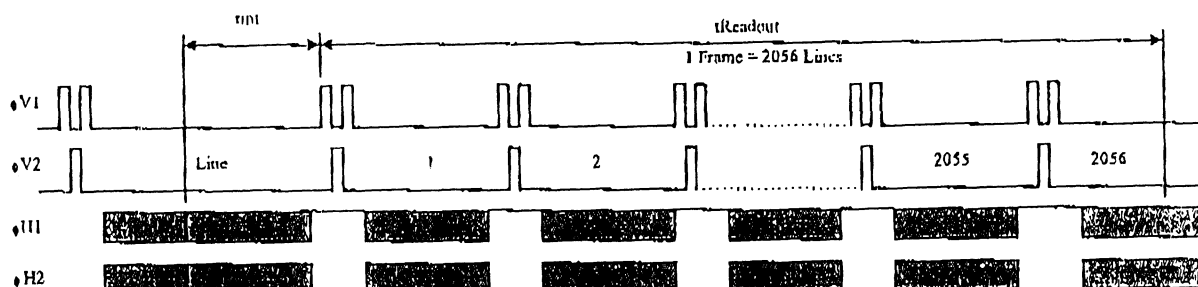

Line Timing Detail

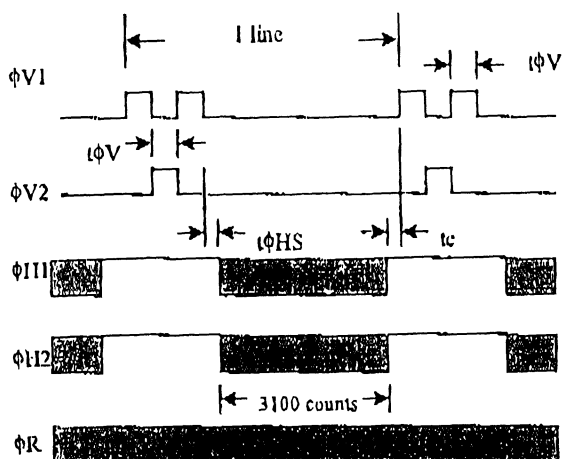


Pixel Timing Detail

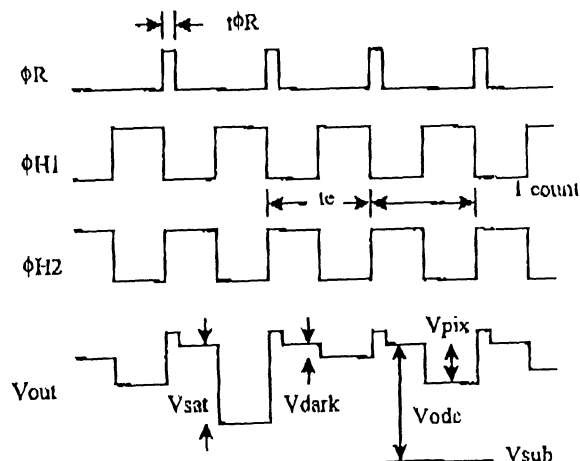

Line Content

1-10 11-16 16-3088 3089-3098 3099-3100



Photoactive Pixels Dummy Pixels

Dark Reference Pixels

Vsat Saturated pixel video output signal
Vdark Video output signal in no light situation, not zero due to I_{dark}
Vpix Pixel video output signal level, more electrons = more negative
Vdc Video level offset with respect to v_{sub}
Vsub Analog Ground

* See Image Acquisition section (page 4)

Figure 5 - Timing Diagrams



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**4.1 Performance Specifications**

All values measured at 25°C, and nominal operating conditions. These parameters exclude defective pixels.

Description	Symbol	Min.	Nom.	Max.	Units	Notes
Saturation Signal						
Vertical CCD capacity	Nsat	85,000	100,000	120,000	electrons / pixel	1
Horizontal CCD capacity		170,000	200,000	240,000		
Output Node capacity		190,000	200,000	220,000		
Red Quantum Efficiency ($\lambda=650\text{nm}$)	Rr	29	35	41	%	
Green Quantum Efficiency ($\lambda=550\text{nm}$)	Rg	29	35	41	%	
Blue Quantum Efficiency ($\lambda=450\text{nm}$)	Rb	9.8	12	14.1	%	
Photoresponse Non-Linearity	PRNL		1	2	%	2
Photoresponse Non-Uniformity	PRNU		1	3	%	3
Dark Signal	Jdark		15	50	electrons / pixel / sec	4
			3.5	10	pA/cm ²	
Dark Signal Doubling Temperature		5	6.3	7.5	°C	
Dark Signal Non-Uniformity	DSNU		15	50	electrons / pixel / sec	5
Dynamic Range	DR	70	74		dB	6
Charge Transfer Efficiency	CTE	0.99997	0.99999			
Output Amplifier DC Offset	Vdc	9.5	10.5	11.5	V	7
Output Amplifier Bandwidth	f _{-3dB}		45		Mhz	8
Output Amplifier Sensitivity	Vout/Ne	9	10	11	uV/e-	
Output Amplifier output Impedance	Zout	175	200	250	Ohms	
Noise Floor	nc~		15	20	electrons	9

Notes:

- For pixel binning applications, electron capacity up to 330000 can be achieved with modified CCD inputs. Each sensor may have to be optimized individually for these applications. Some performance parameters may be compromised to achieve the largest signals.
- Worst case deviation from straight line fit, between 1% and 90% of Vsat.
- One Sigma deviation of a 128x128 sample when CCD illuminated uniformly.
- Average of all pixels with no illumination at 25°C.
- Average dark signal of any of 12 x 8 blocks within the sensor. (each block is 128 x 128 pixels)
- $20\log (Nsat / nc\sim)$ at nominal operating frequency and 25 °C.
- Video level offset with respect to ground
- Last output amplifier stage only. Assumes 10pF off-chip load..
- Output noise at 25 °C , nominal operating frequency, and tint = 0.



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010


Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

4.2 Typical Performance Characteristics

Spectral Response

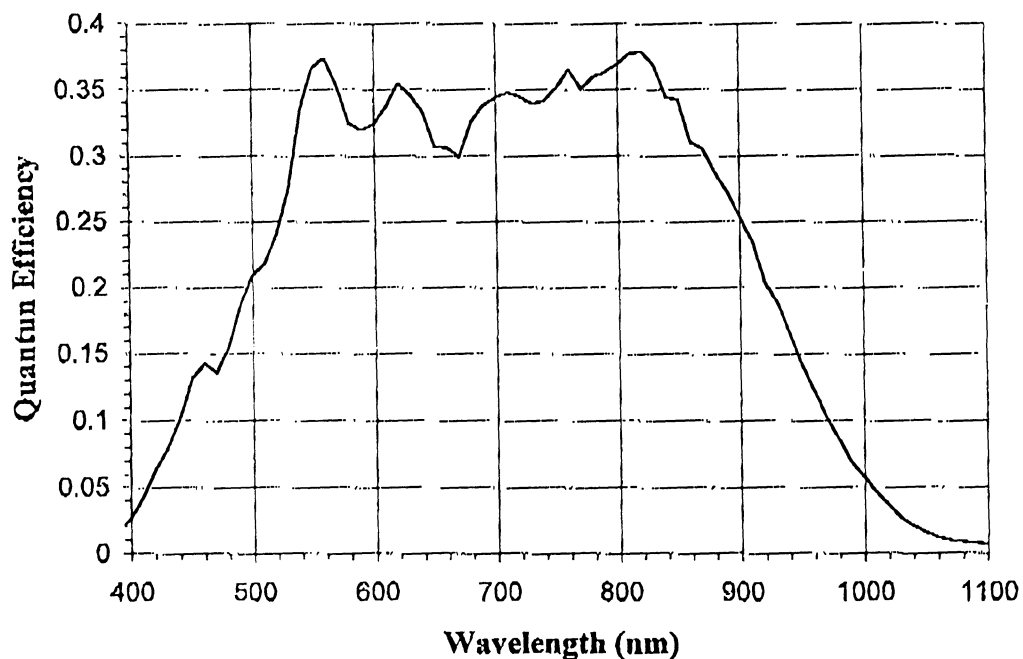

Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010


Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303**4.3 Defect Classification**

Defect tests performed at T=25°C

Class	Point Defects		Cluster Defects		Column Defects	
	Total	Zone A	Total	Zone A	Total	Zone A
C0	0	0	0	0	0	0
C1	≤22	≤9	0	0	0	0
C2	≤45	≤22	≤18	≤9	≤9	0
C3	≤90	≤45	≤36	≤18	≤18	≤9

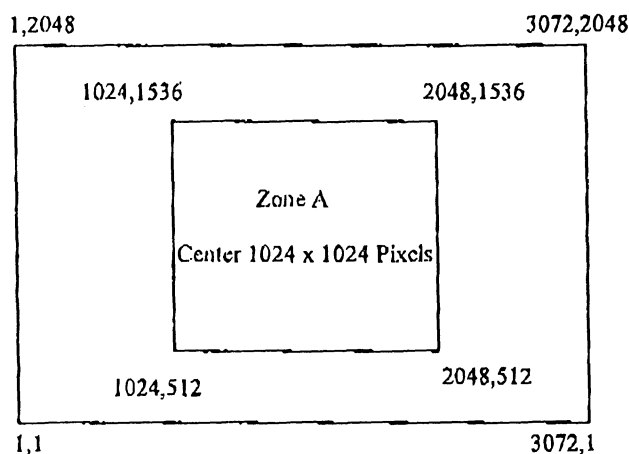**Point Defect**

Dark: A pixel which deviates by more than 6% from neighboring pixels when illuminated to 70% of saturation, OR
Bright: A Pixel with dark current >10,000 e/pixel/sec at 25C.

Cluster Defect

A grouping of not more than 5 adjacent point defects

Column Defect

A grouping of >5 contiguous point defects along a single column, OR
 A column containing a pixel with dark current > 30,000e/pixel/sec,
 OR A column that does not meet the CTE specification for all exposures less than the specified Max sat. signal level and greater than 2 Ke, OR
 A pixel which loses more than 250 e under 2Ke illumination.

Neighboring pixels

The surrounding 128 x 128 pixels or ±64 columns/rows.

Defect Separation

Column and cluster defects are separated by no less than two (2) pixels in any direction (excluding single pixel defects).

Defect Region Exclusion

Defect region excludes the outer two (2) rows and columns at each side/end of the sensor.



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947

KAF-6303

5.1 Quality Assurance and Reliability

- 5.1.1 **Quality Strategy:** All devices will conform to the specifications stated in this document. This is accomplished through a combination of statistical process control and inspection at key points of the production process.
- 5.1.2 **Replacement:** All devices are warranted against failure in accordance with the terms of Terms of Sale.
- 5.1.3 **Cleanliness:** Devices are shipped free of contamination, scratches, etc. that would cause a visible defect.
- 5.1.4 **ESD Precautions:** Devices are shipped in a static-safe container and should only be handled at static-safe work stations.
- 5.1.5 **Reliability:** Information concerning the quality assurance and reliability testing procedures and results are available from the Microelectronics Technology Division and can be supplied upon request.
- 5.1.6 **Test Data Retention:** Devices have an identifying number of traceable to a test data file. Test data is kept for a period of 2 years after date of shipment.

5.2 Ordering Information

See Appendix 1 for available part numbers

Address all inquiries and purchase orders to:

Microelectronic Technology Division
Eastman Kodak Company
Rochester, New York 14650-2010
Phone: (716) 722-4385
Fax: (716) 477-4947

Kodak reserves the right to change any information contained herein without notice. All information furnished by Kodak is believed to be accurate.

WARNING: LIFE SUPPORT APPLICATIONS POLICY

Kodak image sensors are not authorized for and should not be used within Life Support Systems without the specific written consent of the Eastman Kodak Company. Product warranty is limited to replacement of defective components and does not cover injury or property or other consequential damages.



Eastman Kodak Company - Microelectronics Technology Division - Rochester, NY 14650-2010

Phone (716) 722-4385

Fax (716) 477-4947